



ABOUT FLAT BARS

Monarch Metal's architectural aluminum flat bars are extruded from 6063-T6 Aluminum and can be used in various architectural applications. Offering unmatched versatility and strength across a range of industries our architectural aluminum flat bars deliver the durability and adaptability you need. Perfect for commercial and residential applications, they are perfect for cutting, drilling, and welding, making them a go-to choice for frame construction and other applications.

Our architectural aluminum flat bars are available in three widths and three stock lengths and can be easily cut, shaped, and fabricated to suit any project. We can also provide custom lengths up to 16 feet.

FEATURES

- Extruded from durable 6063-T6 Aluminum
- Available in Mill and Clear Anodized Finishes
- Flat bars available in three widths (0.75", 1", 1.5")
- Available in 0.125" stock thickness
- Flat bars available in three stock lengths (48", 96", 192")
- Custom lengths are available, get any length you need up to 16ft.



APPLICATIONS

Our architectural metals are ideal for a variety of applications, including:

- **Millwork & Trim**
Give your space a clean and modern finish to your edges.
- **Protection & Support**
Lightweight, strong, and durable. Our 6063-T6 aluminum flat bars will look good and last for a very long time.
- **Decorative Uses**
Flat bars can be easily formed and shaped into elements such as railings, trims, artwork, and more.
- **Manufacturing**
Flat bars are incredibly easy to cut, drill and weld making them essential for residential or commercial construction.



COMPONENT OVERVIEW

PRODUCT SPECIFICATIONS

Material: 6063-T6 Aluminum

Finish: Mill, Clear Anodized

Specification: ASTM B 221




Type: Architectural

Thickness: 0.125"

Custom Lengths: Any length up to 16'

Applications: Interior / Exterior

Availability: Same Day Shipping

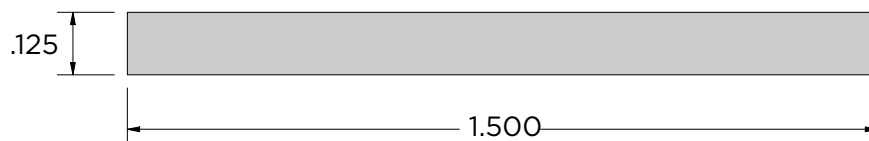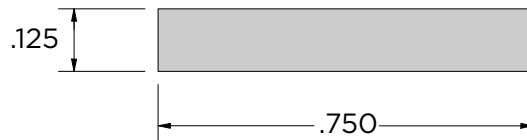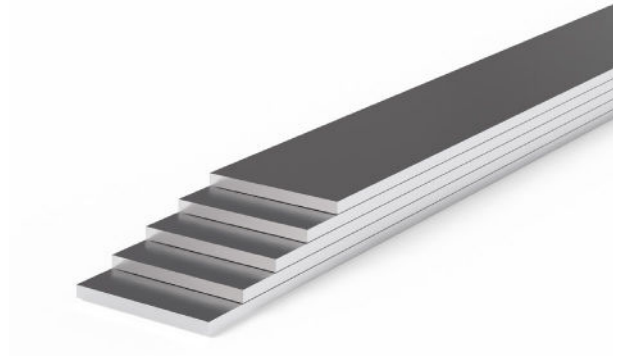

AVAILABILITY

Material	Finish	Length	Dim A	Thickness	Weight
6063-T6	Mill/Clear Anodized	48	0.75	0.125	0.444
6063-T6	Mill/Clear Anodized	48	1.00	0.125	0.600
6063-T6	Mill/Clear Anodized	48	1.50	0.125	0.904
6063-T6	Mill/Clear Anodized	96	0.75	0.125	0.888
6063-T6	Mill/Clear Anodized	96	1.00	0.125	1.200
6063-T6	Mill/Clear Anodized	96	1.50	0.125	1.808
6063-T6	Mill/Clear Anodized	192	0.75	0.125	1.776
6063-T6	Mill/Clear Anodized	192	1.00	0.125	2.400
6063-T6	Mill/Clear Anodized	192	1.50	0.125	3.616



(631) 750-3000