

### ABOUT THE MSNAP SYSTEM

Our new patent-pending, zero-lift rail system for installing a wide variety of interior panels. The system is a snap-fit system of clips and rails, designed to allow for 3/8" projection, or tight to ceilings with no lift off.

MSNAP modules are sold in two versions, a light duty version and a heavy duty version. The MSNAP light duty version is sold with 2" MSNAP-PC2 clips, and MSNAP-WR Rails in 72 or 144" lengths. The heavy duty version is sold as MSNAP-PR and MSNAP-WR continuous rails in 72 or 144" lengths. This allows for the highest weight capacity, and also aids in alignment.



### LEARN MORE ABOUT OUR MSNAP SYSTEM

Scan QR code to learn more  
or visit [www.monarchmetal.com/videos](http://www.monarchmetal.com/videos)

### WHAT'S INCLUDED

MSNAP Option	Wall Rails	Panel Clips	Panel Rails
6 Foot - Light Duty	1	6	-
6 Foot - Heavy Duty	1	-	1
12 Foot - Light Duty	1	12	-
12 Foot - Heavy Duty	1	-	1

### COMPONENT OVERVIEW



#### MSNAP-WR

Our MSNAP wall rails are available in 72 and 144 inch options.



#### MSNAP-PR

Our MSNAP panel rails are strong and perfect for heavy duty panels.



#### MSNAP-PC2

Our MSNAP 2" panel clips are great for light duty hanging applications.



#### ENGAGED MSNAP


When your rails are successfully aligned you should feel & hear them snap.



# ZERO LIFT, SNAP-FIT MSNAP

## PRODUCT SPECIFICATIONS

- Material: 6063-T6 Aluminum
- Finish: Mill
- Clip Size: 2 Inch (panel only)
- Rail Length: 72 Inch, 144 Inch
- Projection: 3/8 Inch
- Hole Diameter: 0.203" Ø
- Lift Off: Zero
- Availability: Same Day Shipping

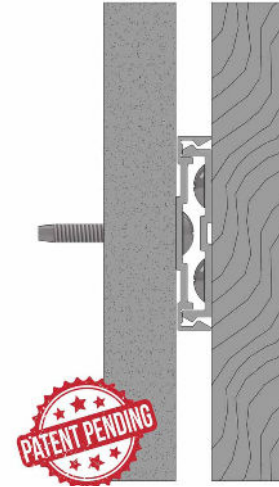

## INSTALLATION



### 1 | ATTACH YOUR WALL RAILS

Using a stud finder and a level, make sure your wall rails are perfectly horizontal. Once the placement is correct, secure your MSNAP-WR with the appropriate fasteners.



### 2 | ATTACH YOUR PANEL RAILS/CLIPS

Once the MSNAP-WR has been installed, measure and mark the vertical distance of your wall rails. This is the exact distance your panel rails/clips will need to be secured to your panel.



### 3 | ALIGN YOUR RAILS

After your wall rails and panel rails/clips have been secured. Lift your panel and align the MSNAP-WR with the MSNAP-PR or MSNAP-PC2 and make sure rails are perfectly aligned.



### 4 | SNAP YOUR PANELS IN PLACE!

Your MSNAP has been successfully installed. Carefully press your item onto the wall rails and make sure all panel rails/clips fully engage with the rails on the wall.



**(631) 750-3000**